

# LASVIT Technical Sheet


## FACET COLLECTION

**DESIGNER:** Moritz Waldemeyer

**YEAR OF DESIGN:** 2016

**Glass:** Hand Blown Artistic Glass

As if trying to systematize the chandelier-making tradition, Moritz Waldemeyer took the geometrical shape of the Classic chandelier outline and turned it into a diamond-like hexagonal glass building block. On its own, with just single pendant, or in combination of multiple items into a large chandelier, the FACET components stand out as clear, disciplined and geometrical. The light source included inside every pendant allows the FACET to be universal and almost unlimitedly extendable.

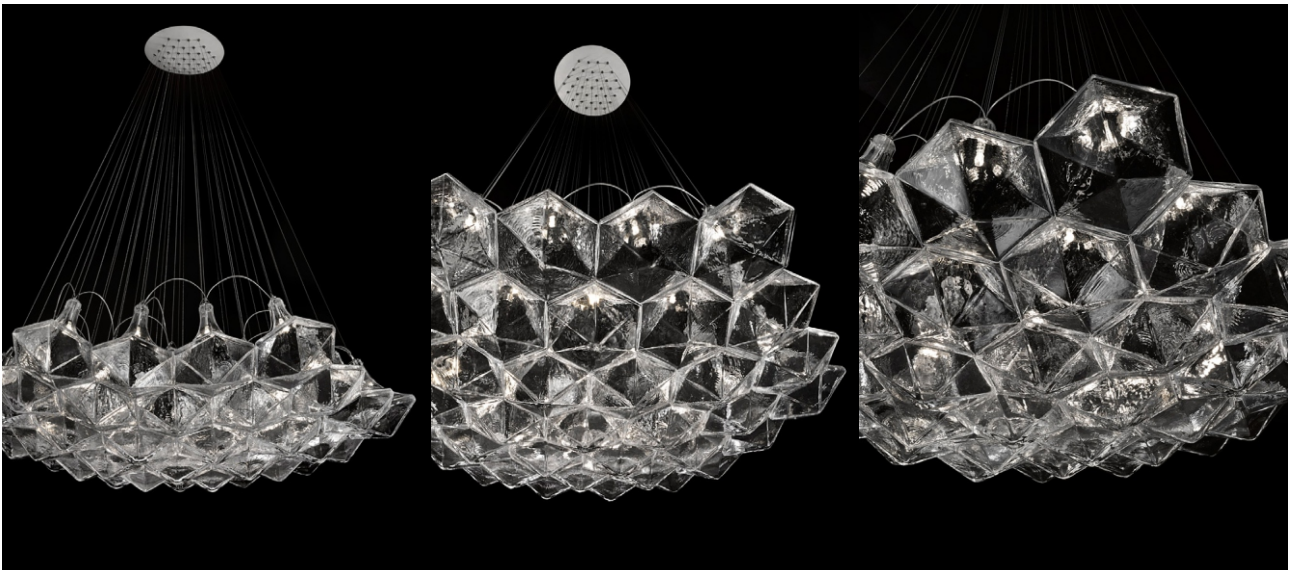

### PACKAGING

#### **Facet 7**

Size: 640 × 605 × 255 cm

Pallet: 120 × 80 × 36 cm

Total weight: 25 kg

#### **Facet 37**

Size: 3 × 640 × 605 × 255 cm

Pallet: 120 × 80 × 78 cm

Total weight: 100 kg

#### **Facet 19**

Size: 2 × 640 × 605 × 255 cm

Pallet: 120 × 80 × 52 cm

Total weight: 50 kg

---

# LASVIT Technical Sheet

## FACET COLLECTION

### TECHNICAL DETAILS FACET 7

Type	CE	UL
Light source	7 × LED G4, 2W, 2700K Lm 200 CRI 80	7 × LED G4, EA, 2,5W 2700K, Lm 230 CRI 80
Input voltage	230AC	110AC
Rated power	14W	17,5W
Ballast	trailing edge	
Metal finish	matt white RAL 9010	
Wire lenght	min. 1000mm untill 3000mm/39 <sup>3</sup> / <sub>8</sub> " – 118 <sup>1</sup> / <sub>8</sub> "	
Prot. rating	IP 20	
Safety class	CLASS I	

# LASVIT Technical Sheet

## FACET COLLECTION

### TECHNICAL DETAILS FACET 19

Type	CE	UL
Light source	19 × LED G4, 2W, 2700K Lm 200 CRI 80	19 × LED G4 EA, 2,5W, 2700K Lm 230 CRI 80
Input voltage	230AC/60Hz	110AC/50Hz
Rated power	37W	47,5W
Ballast	trailing edge	
Metal finish	matt white RAL 9010	
Wire lenght	min. 1000mm untill 3000mm/39 <sup>3</sup> / <sub>8</sub> " – 118 <sup>1</sup> / <sub>8</sub> "	
Prot. rating	IP 20	
Safety class	CLASS I	

# LASVIT Technical Sheet

## FACET COLLECTION

### TECHNICAL DETAILS FACET 37

Type	CE	UL
Light source	37 × LED G4, 2W, 2700K Lm 200 CRI 80	37 × LED G4 EA, 2,5W, 2700K Lm 230 CRI 80
Input voltage	230AC/50Hz	110AC/50Hz
Rated power	74W	92,5W
Ballast	trailing edge	
Metal finish	matt white RAL 9010	
Wire lenght	variable min. 1200mm untill 3000mm/47¼" – 118½ 8"	
Prot. rating	IP 20	
Safety class	CLASS I	

# LASVIT Technical Sheet


## FACET COLLECTION

### TECHNICAL DRAWING

**Facet 7**

**Facet 19**

**Facet 37**

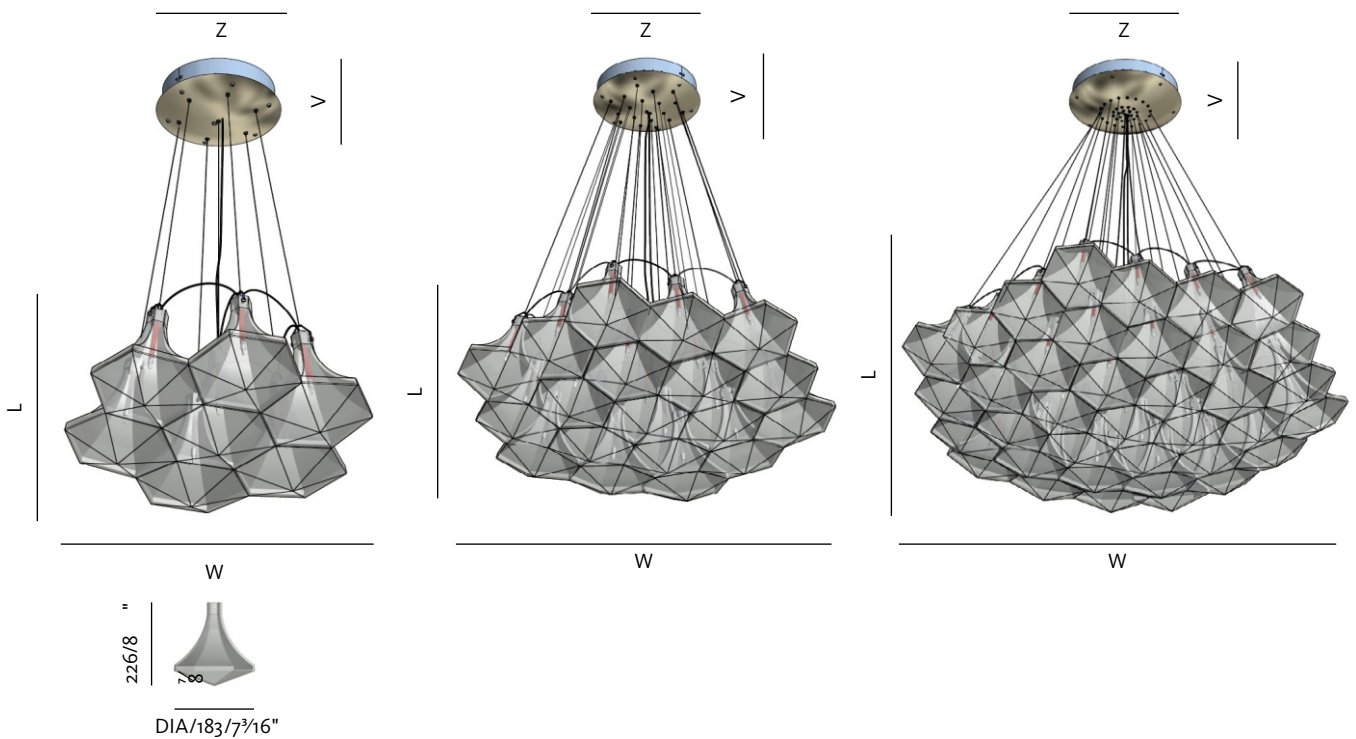

Name	W (mm/inch)	L (mm/inch)	Z (mm/inch)	V (mm/inch)
<b>Facet 7</b>	539/21 1/4"	518/20 3/8" OH min.1000/39 3/8"	225/8 7/8"	66/2 5/8"
<b>Facet 19</b>	895/35 1/4"	830/32 5/8" OH min. 1200/47 1/4"	260/10 1/4 "	75/3"
<b>Facet 37</b>	1270/50"	1154/45 3/8" OH min. 1200/47 1/4"	810/31 7/8"	89/3 1/2"

# LASVIT Technical Sheet

<b>Name</b>	<b>Glass color</b>	<b>Item ID – CE</b>	<b>Item ID – UL</b>	<b>Weight (approx.)</b>
<b>Facet 7</b>	clear	CLo23SA-1CEoo- o11oS1	CLo23SA-1ULoo- o11oS1	11kg/25lbs
<b>Facet 19</b>	clear	CLo23SB-1CEoo- o11oS1	CLo23SB-1ULoo- o11oS1	27kg/60lbs
<b>Facet 37</b>	clear	CLo23SC-1CEoo- o11oS1	CLo23SC-1ULoo- o11oS1	78kg/171lbs

**EACH LASVIT COLLECTION IS UNIQUE BECAUSE IT IS COMPLETELY HANDCRAFTED.  
TINY BUBBLES AND OTHER IRREGULARITIES MAY OCCUR DUE TO THE NATURE  
OF THE HIGH QUALITY GLASS-BLOWING TECHNIQUE**