


# HIDDEN LIGHT PENDANT MANUAL<sup>CE</sup>

EN

by Jan Plecháč & Henry Wielgus

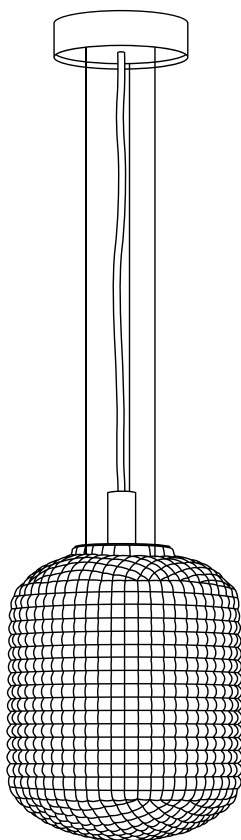

LASVIT

# Symbols



## **Warnings**

Warns you of high risk of damage to the fixture of injury.



## **Warns of electrical injury**

Warn you of high risk of injury should a live part be directly or indirectly touched.



## **Notice**

Warns you about possible damage to the fixture.



## **Important**

Important information regarding the usage of your fixture.



## **Note**

Gives you general information about the usage of your fixture.



## **Class II equipment**

Lighting does not require a connection to electrical earth (ground)



## **For indoor use only**

**Please read this manual carefully and keep it in case you need assistance while performing maintenance and cleaning procedures.**



**Never dispose of this product in mixed municipal waste, it must be submitted at the designated disposal collection center.**

# Warnings



## **Risk of electrical injury**

**Warns you of high risk of electrical injury should a live part be directly or indirectly touched.**

Before starting any procedures make sure that the power to the lighting fixture is switched off and secured against unauthorized, negligent or accidental switching on.

---



## **Warnings**

**Warns you of high risk of damage to the fixture or injury.**

Installation and electrical wiring should be carried out by a qualified electrician to prevent any damage to health or property.

This lighting fixture is to be mounted on fire proof surfaces

For indoor use only. Dry location only.

The manufacturer shall not be held liable for any defects caused by unqualified handling of the lighting fixture.

Lasvit shall not be held liable for any injuries or damage to the fixture or other property caused during installation or by improper fixing.

If the power cable of the luminaire is damaged, it shall be replaced by the manufacturer or a similar qualified person only in order to prevent any damage to health or property.

Do not cover the lighting fixture with any material, it is necessary for the hot parts to be cooled by freely flowing air, otherwise there is a risk of fire.

If the light fixture is used in a way other than as described in the manual, it may become hazardous or its lifespan may be shortened.

Never rotate the light when suspended.

Should the cable need to be shortened, ask a qualified technician (licensed electrician) to disconnect the cable, shorten it and reconnect it. The same applies to lengthening the cable, however a new, longer cable needs to be purchased separately. Lasvit shall not be held liable for any injuries or damage to the fixture or other property caused by unauthorised manipulation with the cable or its parts.

---



### **Important**

#### **Important information regarding the usage of your fixture.**

Installation requires 2 people.

Fixing material is not part of the lighting fixture kit.

To retain quality of hand-blown glass, Lasvit recommends to cleaning the glass at least every 3 months, please see Product care manual.

Proper fixing is the responsibility of the customer.

LED module can be supplied by the manufatrurer only, Lasvit s.r.o.

LED module can by replaced only by a qualified electrician (trained electrician).

# Cleaning manual


## General Instructions

We recommend regular cleaning to maintain the appearance of the light.

Lights may require additional cleaning due to transportation, storage and installation.

Please follow the recommended instructions when cleaning.

Never rotate the light when it is suspended.



If you need advice or have any questions, please contact us at [customer.care@lasvit.com](mailto:customer.care@lasvit.com) or your sales representative.

---

## Recommended Cleaning Agents:

! Do not use products with added hydrogen peroxide!

! Do not use products with an abrasive component!

Do not use products containing alcohol.

Do not use products containing silicone.

Use of other than recommended cleaning agents may damage the surface of the light.

Use a dish detergent for standard cleaning.

For rinsing, use clean lukewarm water, ideally demineralized water.

---

## Recommended Cleaning Aids:

The aids must always be clean and free of abrasive parts.

Use a microfiber cloth for cleaning.

Use a soft sponge without abrasive side for washing.

Use an absorbent lint-free cloth for drying.

Use high-quality paper towels for drying and polishing.

Use a dusting wand. We recommend a feather duster with a handle.

---

### **Regular Cleaning - No Disassembly**

For routine maintenance, carefully dust the surface with a clean, soft duster.

Then polish it with a polishing agent and a clean microfiber cloth.

---

### **Thorough Cleaning - Partial Disassembly**

Before starting the disassembly, carefully dust the surface with a clean, fine duster.

Prepare two containers, placing a clean towel in the bottom of each to avoid scratching the glass component.

In the first container, prepare a washing solution and wash each glass component.

In the second container, with clean water, rinse the glass component.

Spread the components on a clean, dry towel, let any water drops drain, then dry thoroughly using an absorbent, lint-free cloth.

Repeat this procedure if necessary.

Then polish with a polishing agent and a clean microfiber cloth.

Before reinstalling the components, use cotton gloves to avoid leaving undesirable fingerprints on them.

---

### **Cleaning with Service Required**

In the case of dirt that cannot be cleaned by the methods described above or that requires extensive disassembly, we recommend contacting the manufacturer or a professional service provider.

# Step-by-step installation

1. Canopy disassembly
2. Fixing
3. Glass installation
4. Electrical wiring
5. Canopy mounting




Consulting a specialist before choosing type of fixing materials and procedures for a given fixture is highly recommended.

Pictures shown are for illustration purposes only.


---

## Package contents:


### 1x canopy




### 1x Light source assembly



### 1x Bag with accessories

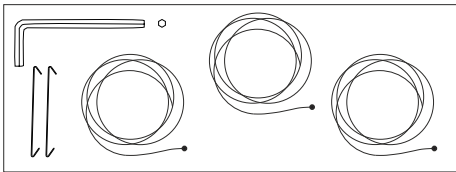


### 1x Glass




# 1. Canopy disassembly


Step 1a/

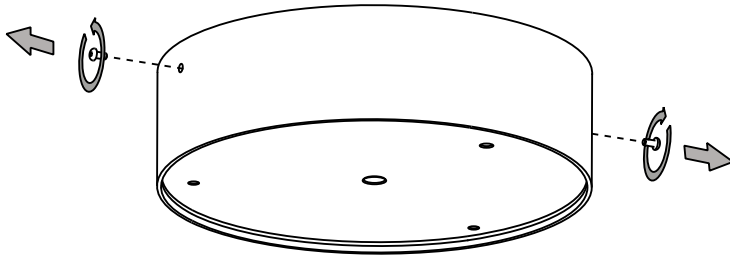

Step 1b/

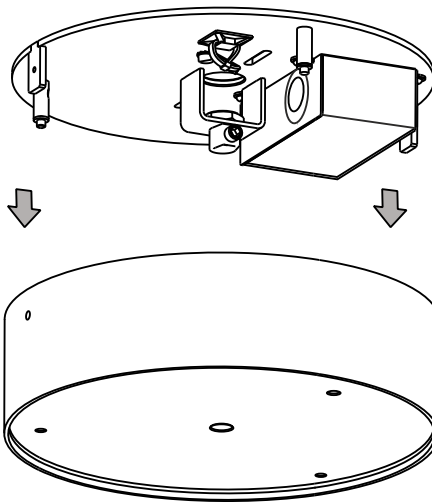


# 2. Fixing

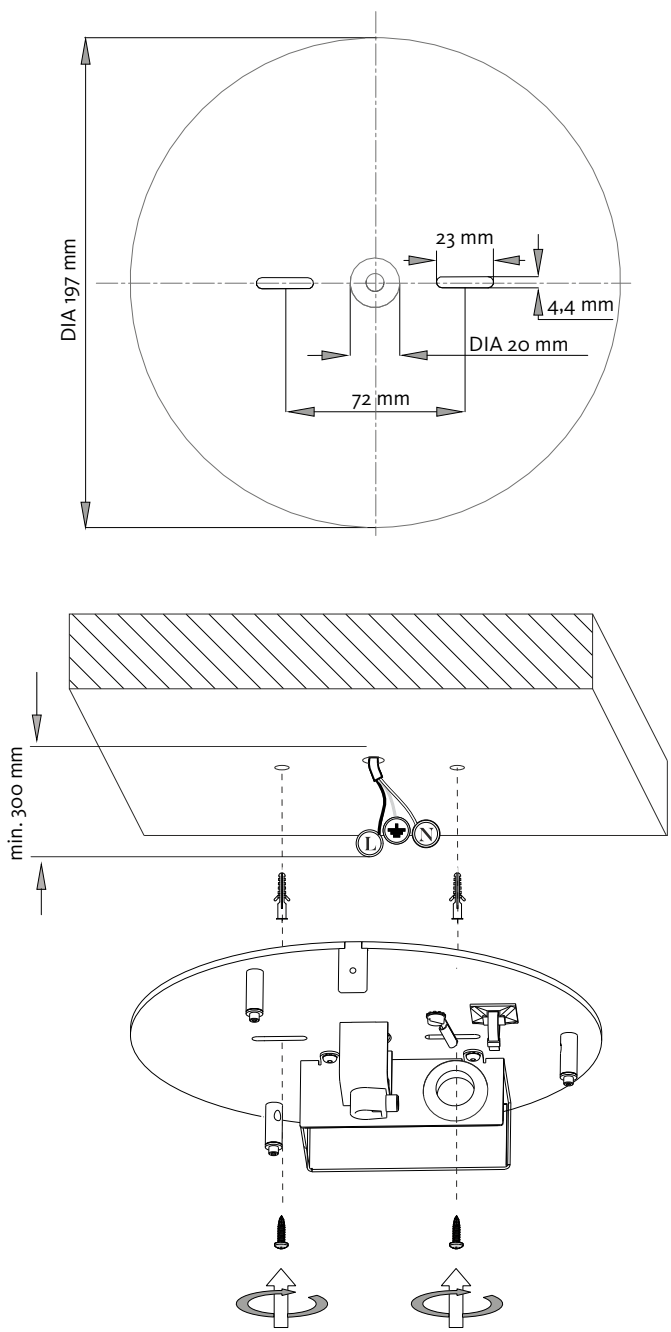


# 3. Glass installation


Step 3a/

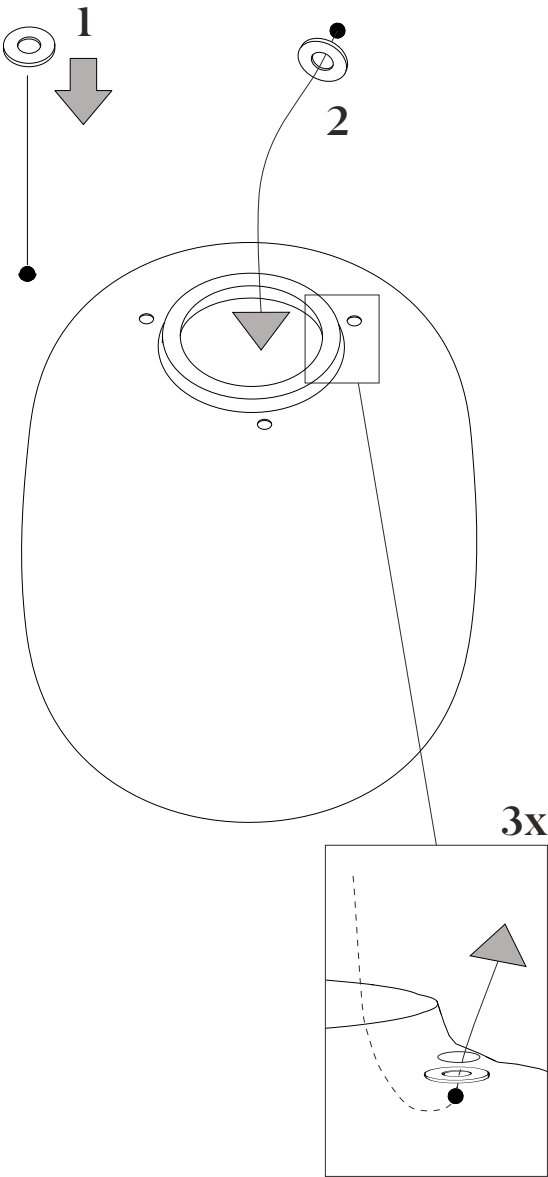


Step 3b/ For easier installation use the included installation hooks (pos. A).  
Take care not to break the ground cable (pos. B).

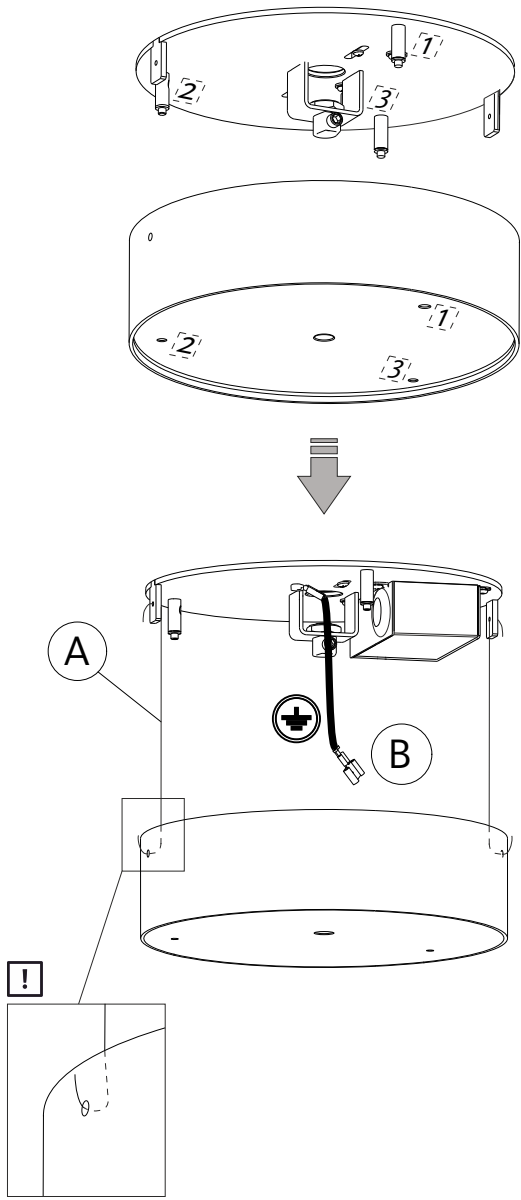

Step 3c/

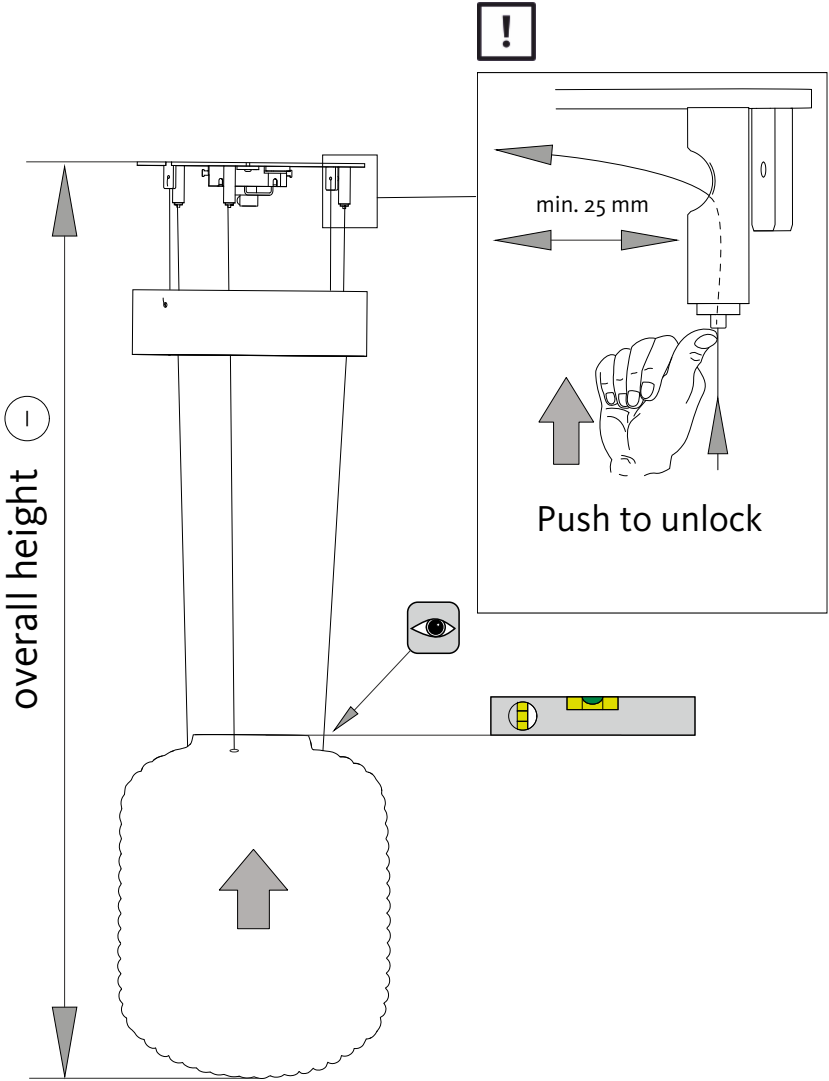


Step 3d/

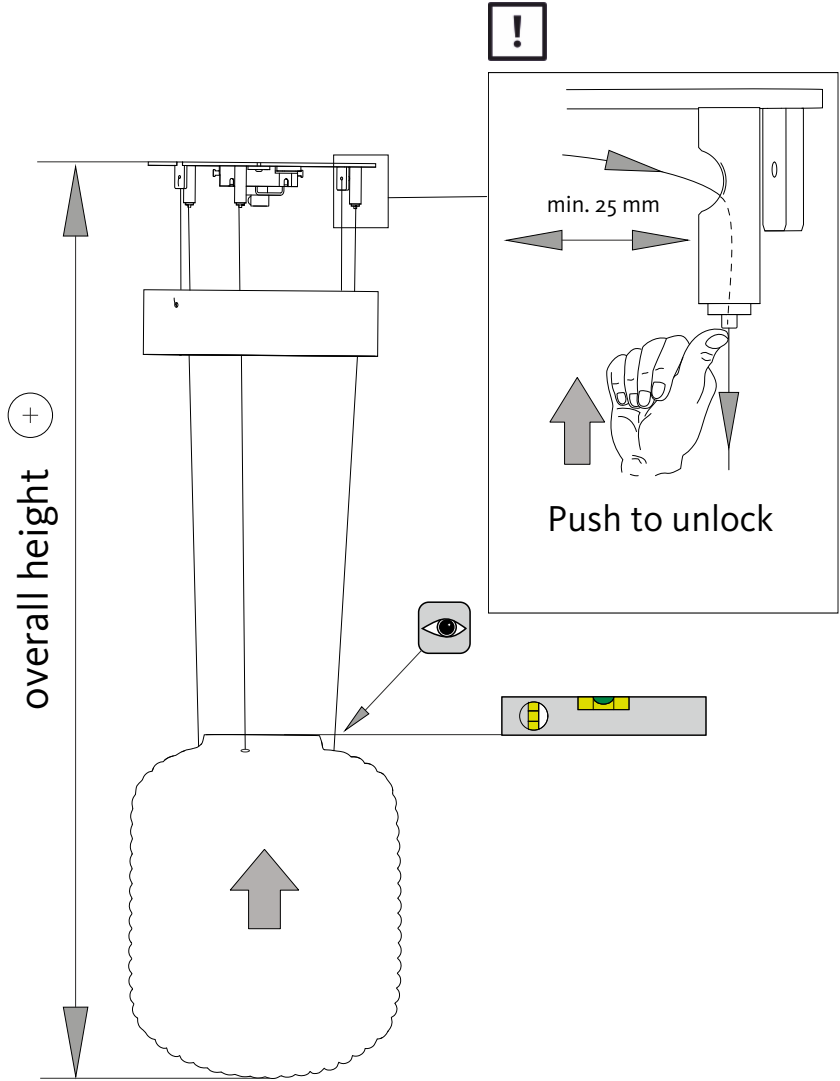


# 4. Electrical wiring


Step 4a/

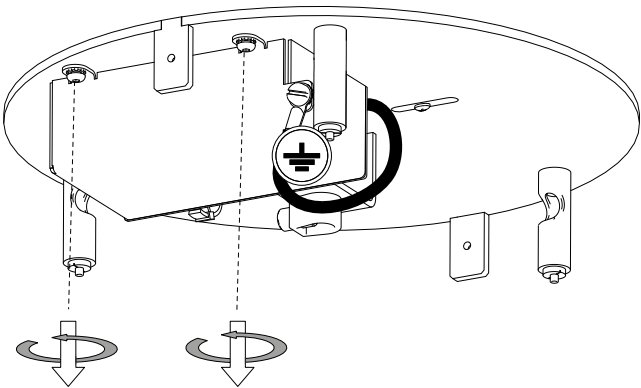


Step 4b/

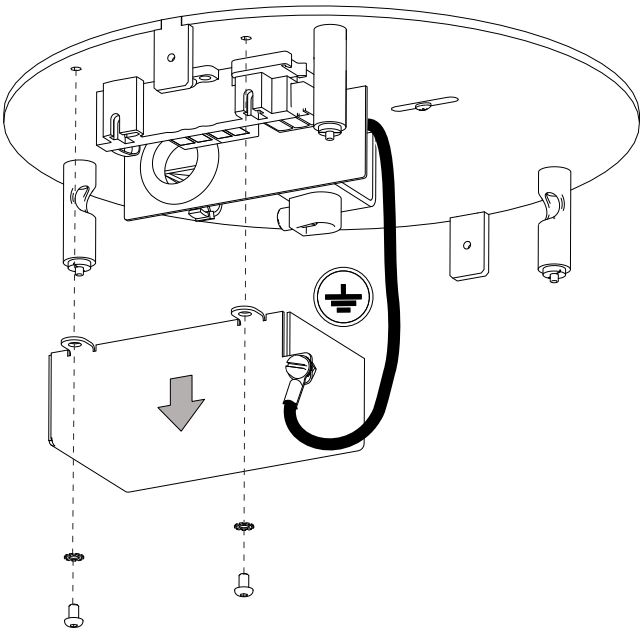



Step 4c/ Place the assembly with light source into the glass.

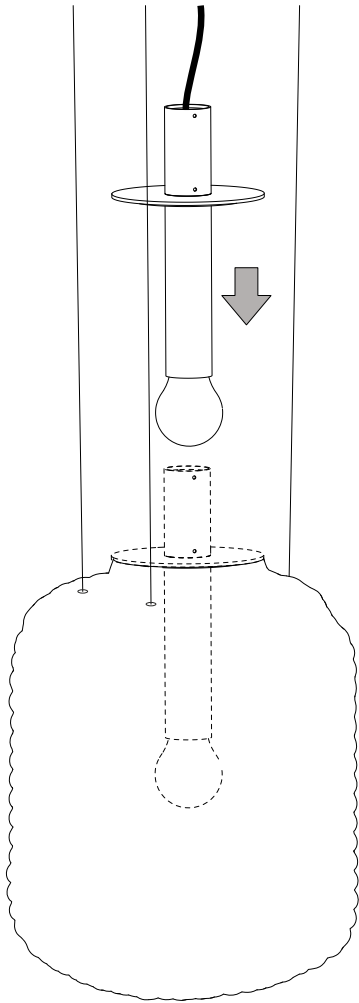


Step 4d/

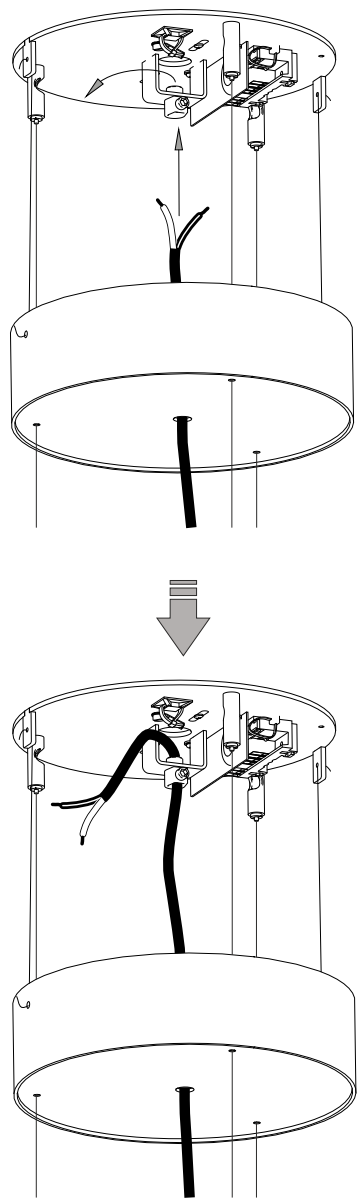


Step 4e/ Cable layout

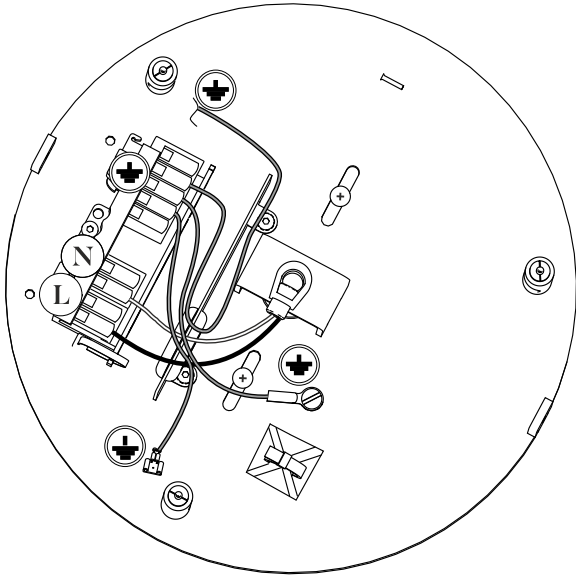


Step 4f/

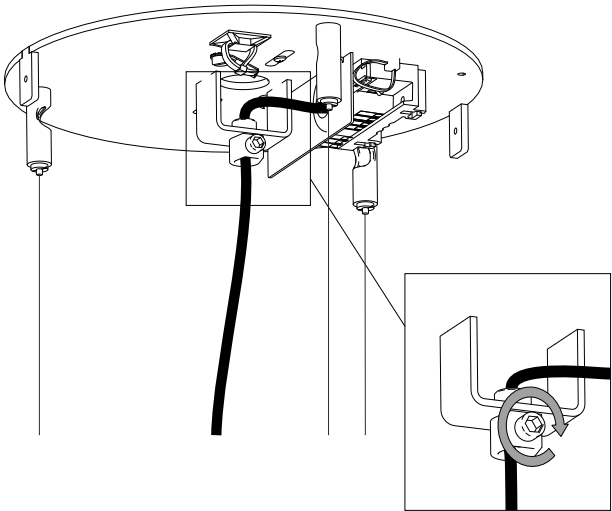


Step 4g/




Power supply cable

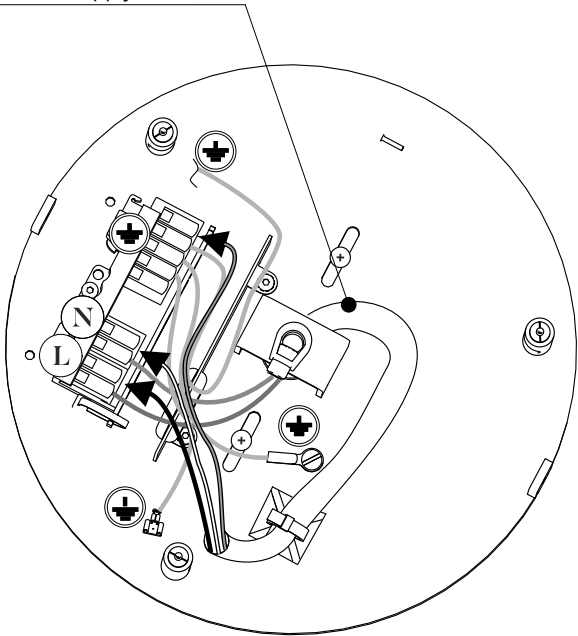


Step 4h/

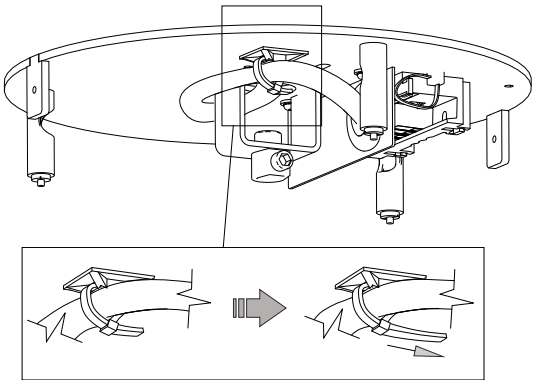


Step 4i/

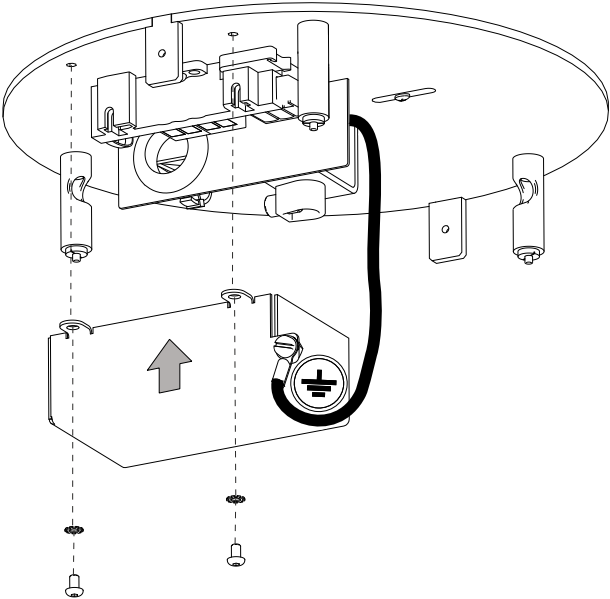

Step 4j/

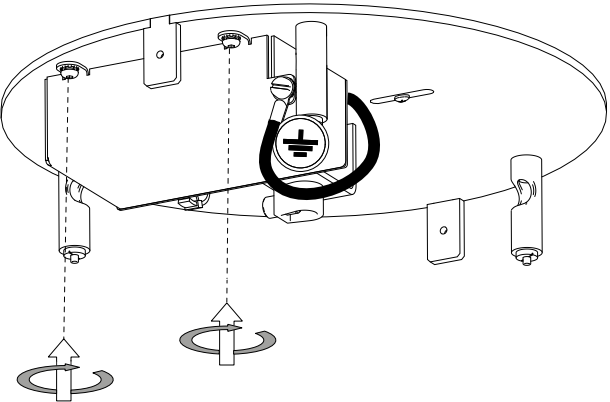

# 5. Canopy mounting

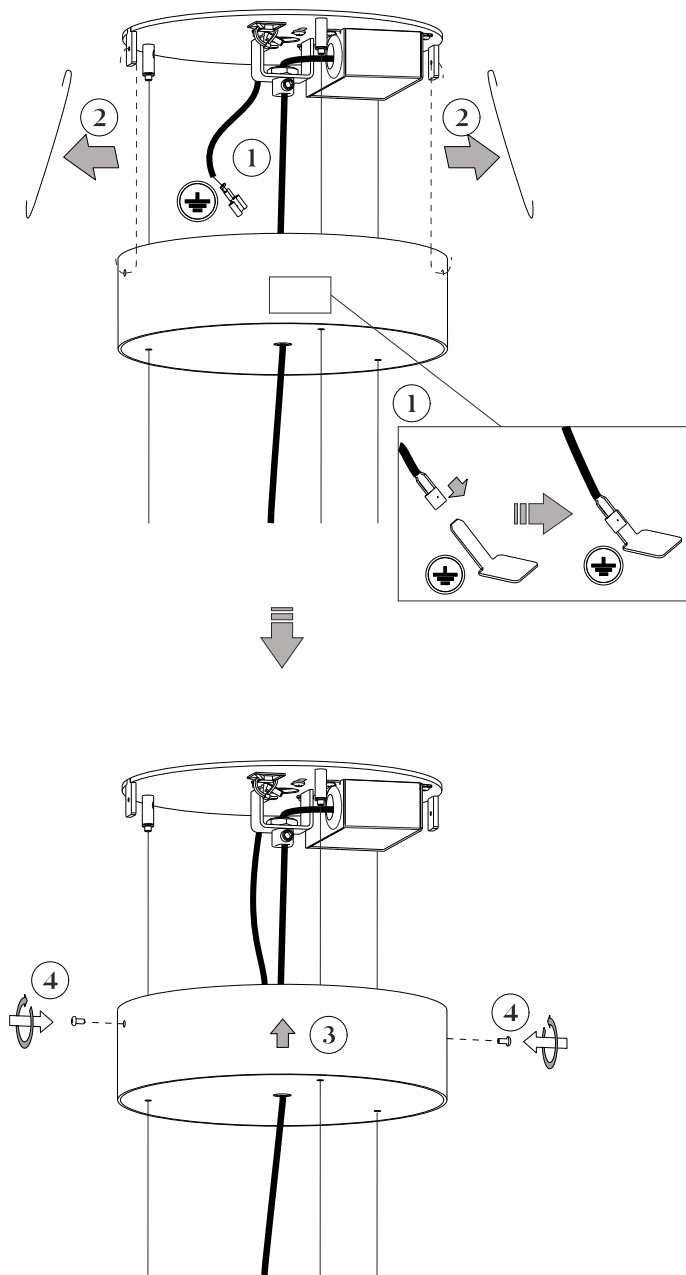

# Light source replacement

All light sources can be supplied by the manufacturer, Lasvit s.r.o.

Replacement of the bulb should be carried out by qualified technician to prevent damage to health or property.


Lasvit provides NO warranty on bulbs and is not responsible for any damage or injury caused during its installation or during its operation.

Before starting installation make sure the power to the lighting fixture is switched OFF and secured against unauthorized, negligent or accidental switching ON.

The manufacturer shall not be held responsible for injuries, damage to the fixture and/or other property when other than specified light source type and/or rating is used.

Carry out this step in reverse to fit the new bulb.

Plug in the light again.

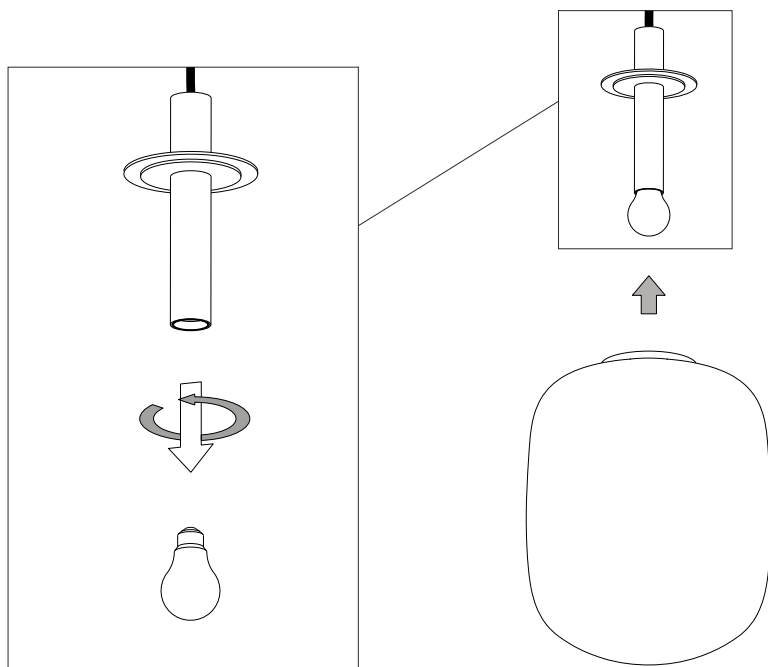

# Installation and warnings notes

Should the cable need to be shortened, ask a qualified technician (licensed electrician) to disconnect the cable, shorten it and reconnect it, detailed instructions can be found in the chapter Cable shortening. Perform the cable adjustment according to valid standards.

The same applies to extend the cable however a new, longer cable needs to be purchased separately.


Lasvit is not liable for any injuries or damage to the fixture or other property caused by unauthorized manipulation with the cable or its parts.

Do not spin the pendant! Spinning of the pendant may result in breaking of the suspension cable and/or electrical malfunction.

Do not cover the lighting fixture with any material, it is necessary for the hot parts to be cooled by freely flowing air, otherwise there is a risk of fire.

## Cable shortening


This adjustment can be carried out only by a qualified electrician.

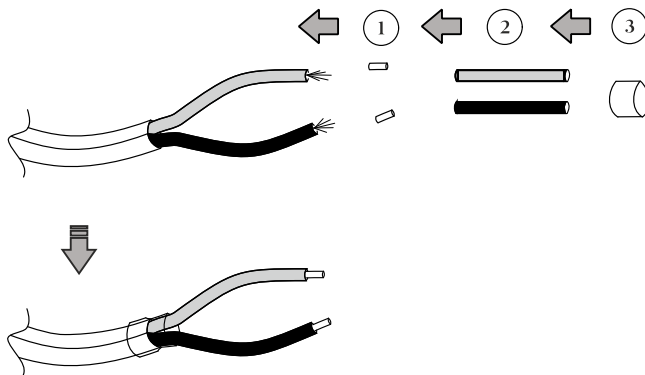


# Wire shortening

It is necessary to have minimal 25 mm overlap of the wire (position A) above the wire gripper (position B).


If you need to shorten the length of the wire, follow the pictures.  
Use sharp wire cutters.

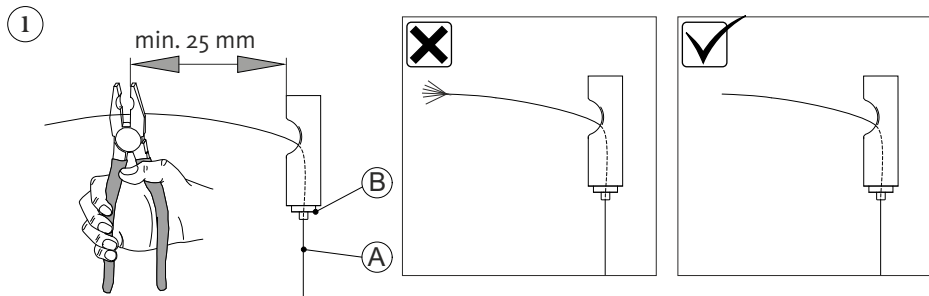

! Use super glue to prevent wire fraying.

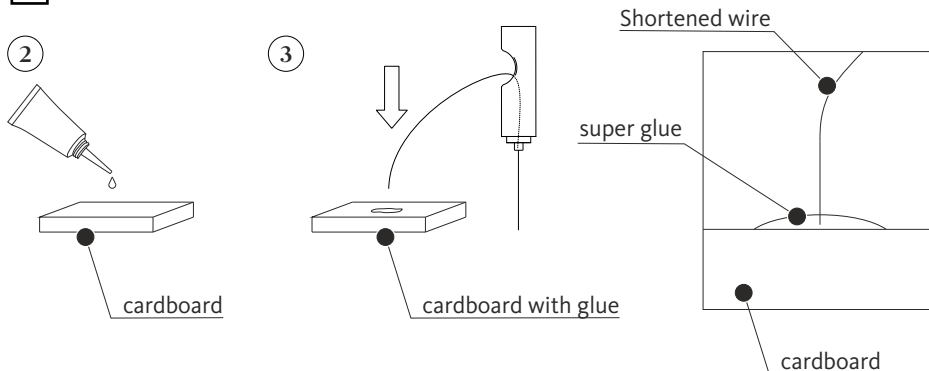


Excess glue must be wiped off immediately to allow further manipulation of the wire in the Reutlinger.

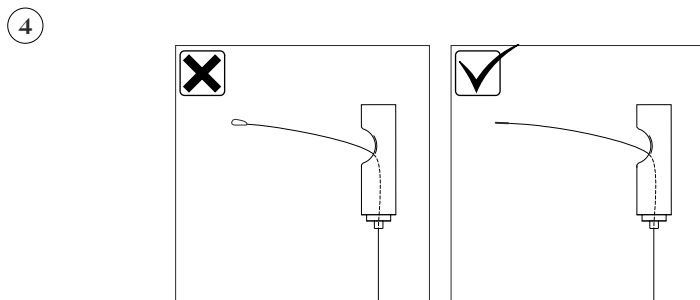


# Removing the glass for cleaning


Step 1/

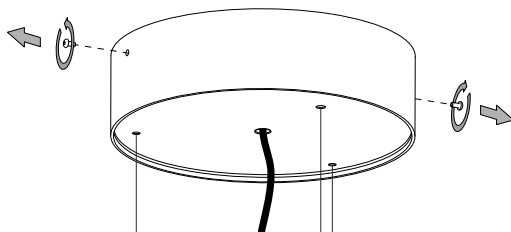


Step 2/

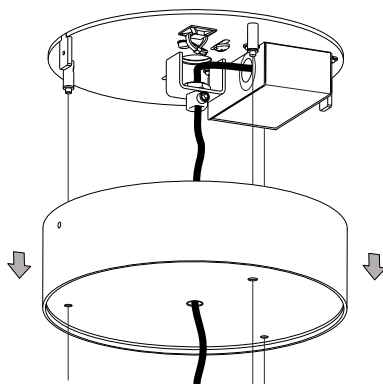


For easier installation use the included installation hooks (pos. A). Take care not to break the ground cable (pos. B).

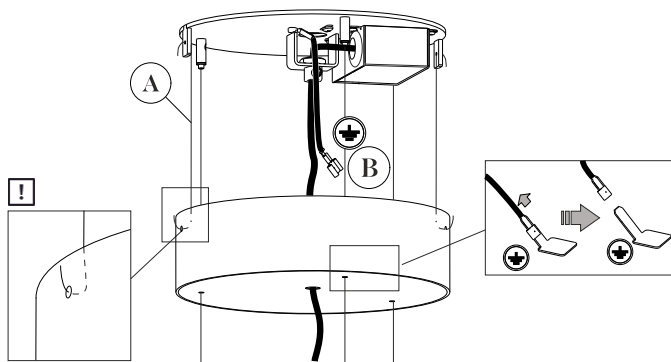

Step 3/

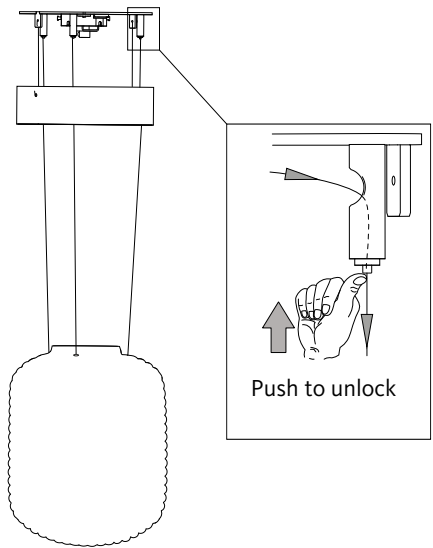

Step 4/

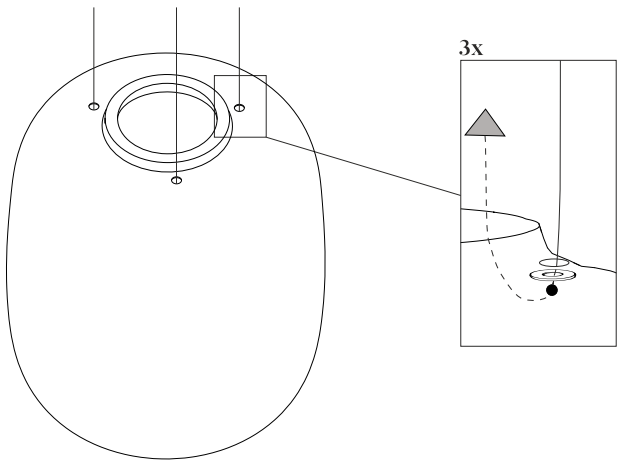

When cleaning the glass, follow the instructions in the Product care manual. When the cleaning is complete, return to the Chapter 3/ Glass installation and install the glass.

# Warranties and Warranty Terms and Conditions

1/ The warranty is defined in the Price Quotation, Price Agreement, Contract, or Order. If the Price Quote, contract, or order is not issued, the warranty does not apply to resources, maintenance, service and cleaning. The standard warranty on the goods is set for 2 years. Other agreed warranties must be specified in the Price Quotation, Price Agreement, Contract, or Order.

2/ As a basis for the claim, the customer must provide a valid contract, invoice, or other proof of payment. Otherwise, the manufacturer reserves the right to refuse to provide a warranty, so keep the proof of product purchase carefully.

3/ If the warranty applies to the defect found, the customer informs the seller by e-mail, telephone, or the Sales department of the manufacturer (Lasvit) and passes the required information (project number or light number, project or light name and describes the defect).

4/ The Sales Department proceeds on the basis of an internal customer complaint resolution directive.

5/ The manufacturer will analyse the occurrence of a disagreement with the customer or with the manufacturer after delivery of the non-conforming product to the manufacturer's premises.

6/ Once the analysis has been made, the Sales department is handed over the decision to accept or reject the complaint with an explanation.


7/ The Sales department agrees with the customer for further steps (e.g. repair or replacement date, etc. on the basis of customer and manufacturer possibilities). Unless otherwise agreed, the manufacturer is obliged to remove the defect within 30 days of the claim date at the manufacturer's expense.


8/ The warranty does not apply to:


- warranty on bulbs
- defects caused by the customer
- defects caused by a third party
- defects caused by regular usage
- defects caused by an installation contrary to the installation manual
- defects caused by inappropriate attachment or product connection
- defects caused by performed in contradiction with the Product care manual
- defects caused by the use of other than defined light sources
- defects caused by installation in premises that do not correspond to the nature of the light and its IP cover (intrusion protection).
- defects caused by force majeure

9/ The company Lasvit has the exclusive right to grant, deny or change the terms and conditions for the provision of warranty services.

Notes









Quality Control / Passed

Controller -----

Date -----

**In case you need any assistance  
or have any suggestions,  
please contact us at**

**lasvit.com**

---

**© LASVIT s.r.o.**

**Komunardů 32**

**170 00 Prague 7 / Czech Republic**

**T +420 481 120 810 / F +420 481 120 622**

**E [customer.care@lasvit.com](mailto:customer.care@lasvit.com)**

**LASVIT**